


Senovol PID sensors are designed for the detection of a wide variety of volatile organic compounds (VOCs). In general, any compound with an ionization energy (IE) lower than that of the lamp photons can be measured. Based on its proprietary ultraviolet (UV) lamp technology, Senovol PID sensors have the advanced features of high UV outputs, and long lamp life spans.

Product Dimensions

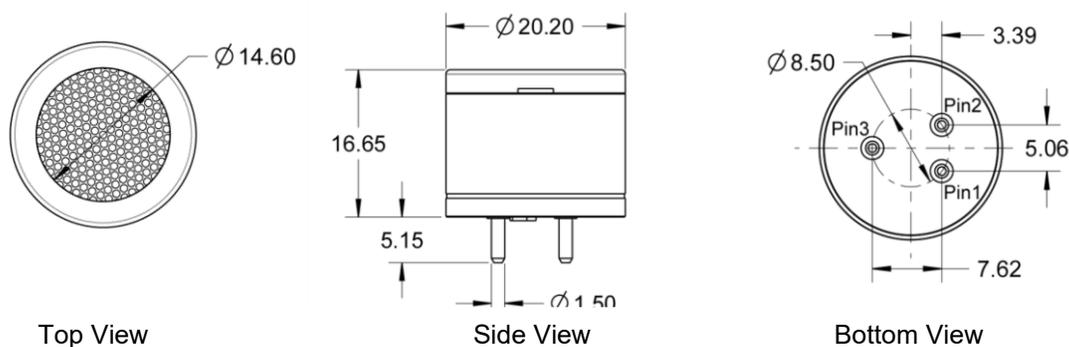

All dimensions in mm

Performance

Photon energy	10.6 eV
Measurement range	0 ~ 10,000 ppm isobutylene
Resolution	0.5 ~ 2,000 ppb isobutylene
Response time (T90)	< 5 seconds
Zero signal (20°C)	70 ±15 mV
Linearity	linear from 0.045 ~ 2.5 V

Electrical

Supply voltage	3.2 ~ 5.5 V
Working current	< 35 mA at 5 V
Output signal	0.045 ~ 2.5 V

Mechanical

Enclosure	Stainless steel
Weight	15 grams

Environmental

Temperature range	-20°C ~ +50°C
Pressure range	1 atm ± 10%
Humidity range	0 % ~ 99 %RH Non-condensing

Life Time

Storage Temp	0 °C ~ 30 °C
Operating lifetime	5 years (excluding lamp and electrodes)
Typical lamp life	10,000 hours
Storage life	2 years in original packaging
Warranty	12 months

Approvals

CE

Note: IECEx and ATEX approvals on different 4-Series PID models.

Installation

The output signals from the sensor pins are different. Inappropriate use of the pins in product design will affect the sensor functionality. Exposure to high concentrations of solvent vapors should be avoided under any condition. Mechanical overstress may cause deformation of the sensor enclosure and damage the internal components including the lamp. If the sensor is used in extreme environmental conditions, please contact us for more details.

Pin Out Details Pin 1 – VCC Pin 2 – GND Pin 3 – VOUT


Product Selection

Product Name	Part Number	Measurement Range	Photon Energy	Resolution	Sensitivity	Response Time
4PID-5	PID-106S-0050	0 ~5 ppm	10.6 eV	0.5 ppb	> 200 mV/ppm	< 5 s
4PID-10	PID-106S-0100	0 ~10 ppm	10.6 eV	1 ppb	> 100 mV/ppm	< 5 s
4PID-50	PID-106S-0500	0 ~ 50 ppm	10.6 eV	10 ppb	> 20 mV/ppm	< 5 s
4PID-100	PID-106S-1000	0 ~100 ppm	10.6 eV	25 ppb	> 10 mV/ppm	< 5 s
4PID-200	PID-106S-2000	0 ~ 200 ppm	10.6 eV	50 ppb	> 5 mV/ppm	< 5 s
4PID-1000	PID-106S-1001	0 ~ 1000 ppm	10.6 eV	250 ppb	> 1 mV/ppm	< 5 s
4PID-2000	PID-106S-2001	0 ~ 2,000 ppm	10.6 eV	500 ppb	> 0.5 mV/ppm	< 5 s
4PID-5000	PID-106S-5001	0 ~ 5,000 ppm	10.6 eV	1,000 ppb	> 0.2 mV/ppm	< 5 s
4PID-10000	PID-106S-1002	0 ~ 10,000 ppm	10.6 eV	2,000 ppb	> 0.1 mV/ppm	< 5 s

Note

The performance data in this document is taken by applying isobutylene to the PID sensor using Senovol lab testers. The PID sensor may perform differently if gases other than isobutylene are used.

Sensitivity Temperature Data

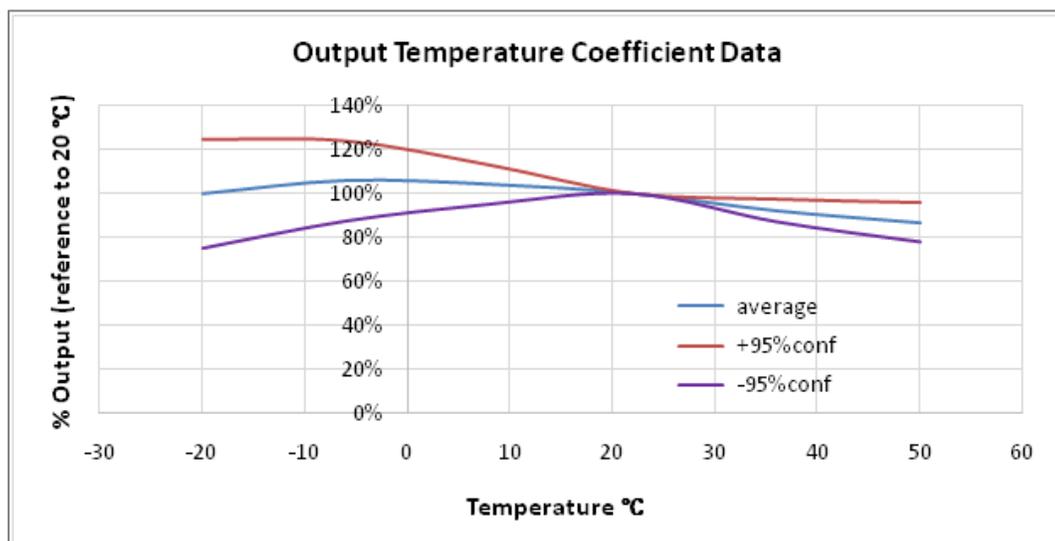

Note

This sensor is used in gas detection instruments. The instrument's user guide must be read carefully, and all calibration procedures must be followed using certified target calibration gas before each use to ensure accuracy. Customers are strongly advised to validate sensor performance for their specific product designs or applications, using this document as a reference.